

Desiccant Dryers

HMW SERIES

FEATURES AND BENEFITS

- Internal-heat regeneration system
- Economical regeneration process
- Minimal regeneration air usage
- Long life of the heater elements and desiccant
- Energy saving with dew point control (optional)
- Modern touch screen control inter-face option
- Mechanically stable, low-dusting desiccant
- 16 bar.g (Optional)




Technical Data	HMW 74 - 308	HMW 385 - 1284
Inlet / Outlet	Inlet bottom rear / Outlet top rear	
Desiccant	Activated Alumina	
IP class	(Control box: IP 54)	
Compressed air connection: Threaded	●	○
Welded with DIN flanges	○	●
Pressure dew point control		○
Safety relief valves		○
Control: PLC		●
Energy management		○
Noise level	< 71 dB(A) LEQ	
Lockable main switch		●
Different voltage		○
Hankison® pre- and after-filter		●
General Data		
Medium	Compressed air	
Drying system	Twin-tower adsorption	
Regeneration system	Internal-heat regeneration system, thermostatic control	
Housing material	PED 97/23/EC. Module H	
Colour	RAL 5015 (blue), special finishing optional	
Installation	Indoors	
Mounting	Freestanding; anchor holes provided	

● standard ○ On request – not applicable

Model	FlowRate*	Connection	Dimensions			Weight	Operation	Control	Power Consumption (kW)		Pre-filter	After-filter
			A	B	C				Average	Installed		
	m ³ /h			mm		kg	V/Ph/Hz					
HMW 74	245	1"	670	450	2,170	300	400/3/50	24VDC	1.7	3.6	F08-B-HF	DF08-HTA
HMW 120	400	1 1/2"	855	500	2,280	450			2.7	5.4	F12-B-HF	DF12-HTA
HMW 196	653	1 1/2"	905	550	2,260	670			3.6	7.2	F12-B-HF	DF12-HTA
HMW 236	785	2"	1,035	600	2,750	800			4.5	9.0	HF5-52	HF6-52HTA
HMW 308	1,026	2"	1,085	650	2,750	950			5.4	10.8	HF5-56	HF6-56HTA
HMW 385	1,282	DN 80	1,475	1,060	3,050	1,300			7.2	14.4	HF5-56	HF6-56HTA
HMW 575	1,916	DN 80	1,600	1,110	3,050	1,900			10.8	21.6	HF5-56	HF6-56HTA
HMW 675	2,250	DN 80	1,600	1,160	3,050	2,110			12.6	25.2	HF5-60	HF6-60HTA
HMW 801	2,670	DN100	1,750	1,185	3,175	2,400			14.4	28.8	HF5-60	HF6-60HTA
HMW 1077	3,590	DN100	1,750	1,235	3,175	3,100			18.9	37.8	HF5-64	HF6-64HTA
HMW 1284	4,280	DN100	1,790	1,260	3,175	3,400			22.5	45.0	HF5-68	HF6-68HTA

* ISO 7183, based on the intake volume of the compressor at +20°C and 1 bar (a), operating pressure 7 bar (g), inlet temperature +35°C, ambient or cooling water temperature +25°C, pressure dew point -40°C. Technical data and specifications are subject to change without prior notice.

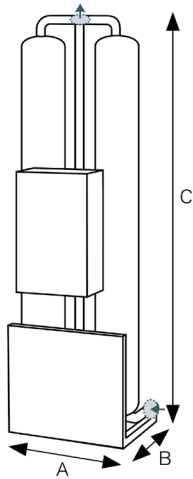

Design Data*	Min.	Nominal	Max.
Operating pressure	5 bar (g)	7 bar (g)	10 bar (g) (16 barg optional)
Inlet temperature	+5°C	+35°C	+50°C
Pressure dew point		-40°C	
Ambient temperature	+5°C	-	+50°C
Relative humidity inlet air		100%	

Max. operating pressure of 16 bar (g) available on request.

* The following correction factors need to be used to select the correct unit for other operating conditions.

Correction factors for different operating pressures in bar (g) (F ₁)												
bar (g)	5	6	7	8	9	10	11	12	13	14	15	16
HMW 74 - 1284	0.75	0.88	1.00	1.13	1.25	1.38	For a selection consult your distributor					

Correction factors for different inlet temperatures in °C (F ₂)							
°C	+5	+30	+35	+40	+45	+50	
HMW 74 - 1284	1.00	1.00	1.00	0.77	0.59	0.46	

Selection example		Calculation	
Compressor capacity (V ₁)	900 m ³ /h	$V_2 = \frac{V_1}{F_1 \cdot F_2} = \frac{900}{1.38 \cdot 0.77} = 847 \text{ m}^3/\text{h}$	Selection: HMW 308
Operating pressure (F ₁)	10 bar (g)		
Inlet temperature (F ₂)	+40 °C		
V ₂	Required dryer capacity		

SPXFLOW



SPX Flow Technology Germany GmbH
 Konrad-Zuse-Straße 25 | D-47445 Moers
 Tel.: +49 (0) 28 41 / 8 19-0 | Fax: +49 (0) 28 41 / 8 19 83
 E-Mail: info@spx-hankison.de
 www.spx-hankison.de | www.spxflow.com

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing.

Please contact your local sales representative for product availability in your region. For more information visit www.spxflow.com.

The green 'S' and 'X' are trademarks of SPX FLOW, Inc.